2/2, 3/2 WAY DIRECT-ACTING SOLENOID VALVE

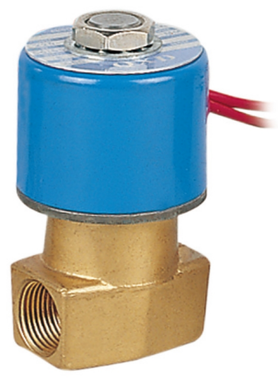

QX22-10

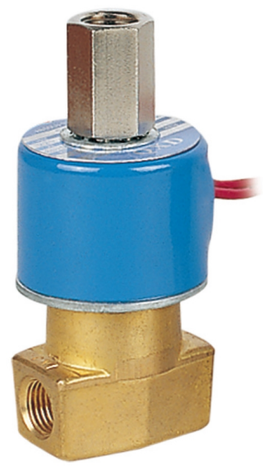

QX23-08

QX23-08-S

Ordering Code

QX	-	22	-	08	-	S	-	V	-	AC220V
Specification Code		**22:** 2/2 way **23:** 3/2 way		Port Size **08:** ZG1/4" **10:** ZG3/8"		**Blank:** Round Coil **S:** Square Coil IP65		Sealing Material **Blank:** NBR **E:** EPDM **V:** VITON **SI:** SI		Standard Voltage **DC12V** **DC24V** **AC24V** 50Hz/60Hz **AC110V** 50Hz/60Hz **AC220V** 50Hz/60Hz **AC380V** 50Hz/60Hz

Product Introduction

Brass direct acting solenoid valve, suitable for neutral gases and liquid, including compressed air, natural gases, water, hydraulic oil and technical vacuum.
Compact design, high quality VITON seal.

Specification

QX22 Series

Model	Port Connection	Orifice Size	CV Value	Pressure Difference (MPa)	Overall Size		Power VA
QX22-08	ZG1/4"	4	0.43	0~0.9	40	75	10W
QX22-10	ZG3/8"						
The following orifice need to be customized							
–		2.4	0.21	0~2.0	–		
–		5	0.5	0~0.6	–		

QX23 Series

Model	Orifice Size		Port Connection	Pressure Difference (MPa)	Overall Size		Standard Voltage	Power VA
	Top	Body			L	H		
QX23-08	2.3	1.6	ZG1/4" 、ZG3/8" Optional	0~0.9	41	95	AC:380V, 220V, 36V	10W
QX23-10	2.3	1.6					DC:220V, 24V	